

<u>EMU8500-8510</u> 'EVENT' ADDING DESCRIPTION IN 'ROUTE EDITOR' SOFTWARE

 PROJECT: P.I.S. EMU 8500-8510
 Date: 14/01/2014
 Page. 1 / 5


1. 'EVENT' ADDITION IN ROUTES:

This document explains briefly the process to add new 'Events' in Routes already created in Routes Database. It's a complement of the 'Route Editor Manual'.

- First, the new 'Resources' have to be created. In this example, an 'audio' resource and a 'text' resource for message 'Seats are not for feet' will be created.
- Open 'Route Editor' software. Click on 'Resources' tabs at the upper & bottom part of the screen.
- At left, there is the resources list. Up, there are several buttons. Click on 'Text Message' Button.
- In the new screen, write all the needed information. We used the name 'Seats not feet' for this resource. Fill in the 'English text' and 'Irish text' if needed. Click 'accept'. It will appear the new resource in the list at left.

 PROJECT: P.I.S. EMU 8500-8510
 Date: 14/01/2014
 Page. 2 / 5



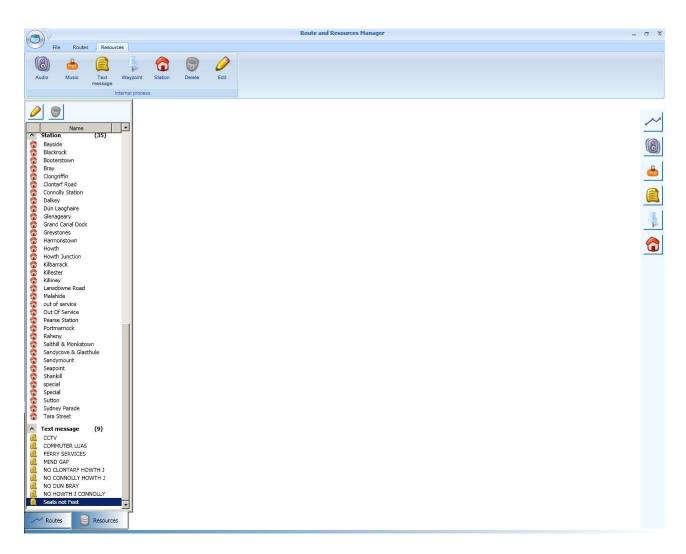


- Click on 'Audio' Button.
- In the new screen, write all the needed information. We used the name 'Seats not feet' for this resource. Select the 'English audio' file and 'Irish audio' file if needed. Click 'accept'. It will appear the new resource in the list at left.

 PROJECT: P.I.S. EMU 8500-8510
 Date: 14/01/2014
 Page. 3 / 5

VEMISA


'EVENT' ADDING DESCRIPTION

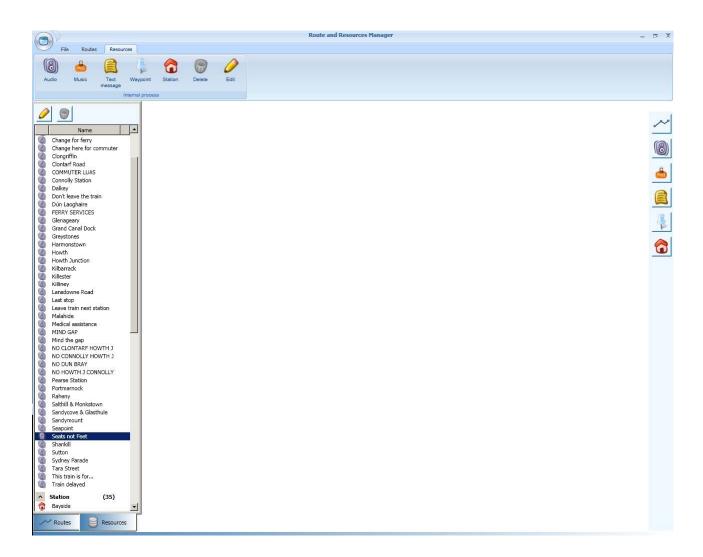

- Click on 'Route' tabs in the upper & bottom part of the screen.
- Select the desired Route to edit and click 'edit' button.
- Click on 'Events' tab.
- Select the desired Resource. In this case we will add two resources, the Audio Resource 'Seat not Feet' & Text Resource 'Seat not Feet'.
- For each resource, add the station related to it. This station is the NEXT one after the resource.
- For each resource (Audio & Text), add the distance to the next station selected. If you write, for example, 150, the resource will be broadcasted 150 meters before arriving at the defined station.

 PROJECT: P.I.S. EMU 8500-8510
 Date: 14/01/2014
 Page. 4 / 5



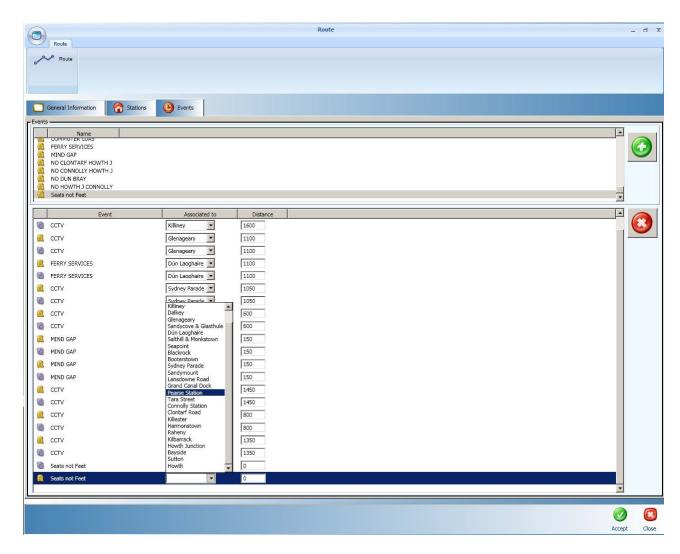

- If you want to broadcast these resources (Audio & Text) before all the stations you'll have to repeat the same procedure for every one of them.
- Also, you'll have to do the same procedure for every Route you need to edit.

 PROJECT: P.I.S. EMU 8500-8510
 Date: 14/01/2014
 Page. 5 / 5